

Ing BONFIGLIOLI

	P 8000 M 2	P 8000 M 3
momento massimo di sollevamento / Max. lifting moment / momento máximo de elevación / couple de levage maximum / Max. Hubmoment	69,5 kNm	67,7 kNm
massima capacità di sollevamento / Max. lifting capacity / maxima capacidad de levantamiento / meilleure capacité de soulèvement / Max. Hubkraft	3150 kg	3000 kg
massima capacità nominale / Max. nominal capacity / maxima capacidad nominal / meilleure capacité nominal / Max. Hubkraft	3540 kg	3450 kg
massimo sfilo idraulico / max. hydraulic outreach / max. alcance hidraulico / rallonge hydraulique max. max. hydraulische reichweite	5400 mm	7050 mm
portata pompa consigliata / recommended pump delivery / caudal bomba aconsejada / debit d'huile recommandé Förderleistung der Hydraulikpumpe	20 l/min	20 l/min
pressione di lavoro / working pressure / presión de trabajo / pression de travail / Betriebsdruck	260 bar	260 bar
capacità serbatoio / tank capacity / contenance du reservoir / capacidad deposito de aceite / Inhalt des Öltanks	37 l	37 l
angolo di rotazione / slewing angle / angulo de giro / angle de rotation / Schwenkbereich	402°	402°
coppia di rotazione / slewing torque / momento de giro / couple de rotation / Drehmoment	12.2 kNm	12.2 kNm
peso gru completa di stabilizzatori estensibili e martinetti piedi / crane weight including side extensions and rams of stabilizers / peso de la grua incluidos las extensiones y los cilindros de los estabilizadores / poids grue complète de bequilles extensibles et verins stabilisateurs / Eigengewicht, einschl-manuell seitlich ausziehbare Abstützungen	890 kg	1110 kg


	P 10200 M 2	P 10200 M 3	P 10200 M 4
momento massimo di sollevamento / Max. lifting moment / momento máximo de elevación / couple de levage maximum / Max. Hubmoment	101,0 kNm	100,9 kNm	97,2 kNm
massima capacità di sollevamento / Max. lifting capacity / maxima capacidad de levantamiento / meilleure capacité de soulèvement / Max. Hubkraft	4500 kg	4380 kg	4130 kg
massima capacità nominale / Max. nominal capacity / maxima capacidad nominal / meilleure capacité nominal / Max. Hubkraft	5080 kg	5040 kg	4960 kg
massimo sfilo idraulico / max. hydraulic outreach / max. alcance hidraulico / rallonge hydraulique max. max. hydraulische reichweite	6050 mm	8050 mm	10000 mm
portata pompa consigliata / recommended pump delivery / caudal bomba aconsejada / debit d'huile recommandé Förderleistung der Hydraulikpumpe	30 l/min	30 l/min	30 l/min
pressione di lavoro / working pressure / presión de trabajo / pression de travail / Betriebsdruck	260 bar	260 bar	260 bar
capacità serbatoio / tank capacity / contenance du reservoir / capacidad deposito de aceite / Inhalt des Öltanks	75 l	75 l	75 l
angolo di rotazione / slewing angle / angulo de giro / angle de rotation / Schwenkbereich	402°	402°	402°
coppia di rotazione / slewing torque / momento de giro / couple de rotation / Drehmoment	20,8 kNm	20,8 kNm	20,8 kNm
peso gru completa di stabilizzatori estensibili e martinetti piedi / crane weight including side extensions and rams of stabilizers / peso de la grua incluidos las extensiones y los cilindros de los estabilizadores / poids grue complète de bequilles extensibles et verins stabilisateurs / Eigengewicht, einschl-manuell seitlich ausziehbare Abstützungen	1560 kg	1700 kg	1820 kg

	P 15000 M 2	P 15000 M 3	P 15000 M 4
momento massimo di sollevamento / Max. lifting moment / momento máximo de elevación / couple de levage maximum / Max. Hubmoment	141,3 kNm	139,4 kNm	137,3 kNm
massima capacità di sollevamento / Max. lifting capacity / maxima capacidad de levantamiento / meilleure capacité de soulèvement / Max. Hubkraft	6000 kg	5800 kg	5600 kg
massima capacità nominale / Max. nominal capacity / maxima capacidad nominal / meilleure capacité nominal / Max. Hubkraft	7200 kg	7100 kg	7000 kg
massimo sfilo idraulico / max. hydraulic outreach / max. alcance hidraulico / rallonge hydraulique max. max. hydraulische reichweite	6000 mm	8000 mm	10000 mm
portata pompa consigliata / recommended pump delivery / caudal bomba aconsejada / debit d'huile recommandé Förderleistung der Hydraulikpumpe	35 l/min	35 l/min	35 l/min
pressione di lavoro / working pressure / presión de trabajo / pression de travail / Betriebsdruck	295 bar	295 bar	295 bar
capacità serbatoio / tank capacity / contenance du reservoir / capacidad deposito de aceite / Inhalt des Öltanks	75 l	75 l	75 l
angolo di rotazione / slewing angle / angulo de giro / angle de rotation / Schwenkbereich	402°	402°	402°
coppia di rotazione / slewing torque / momento de giro / couple de rotation / Drehmoment	20,8 kNm	20,8 kNm	20,8 kNm
peso gru completa di stabilizzatori estensibili e martinetti piedi / crane weight including side extensions and rams of stabilizers / peso de la grua incluidos las extensiones y los cilindros de los estabilizadores / poids grue complète de bequilles extensibles et verins stabilisateurs / Eigengewicht, einschl-manuell seitlich ausziehbare Abstützungen	1910 kg	2070 kg	2230 kg




serie M


P 8000 M/2

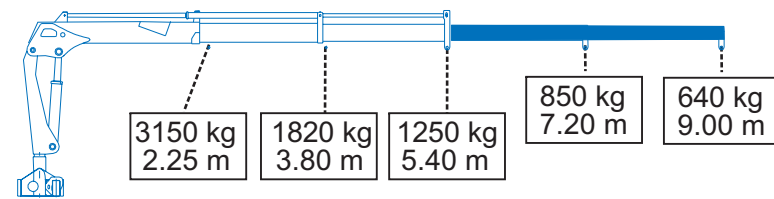


P 8000 M/3

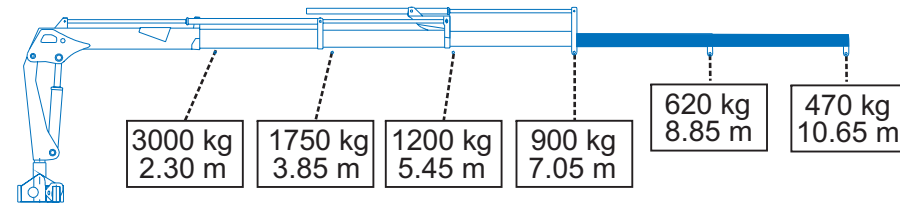


P 10200 M/2

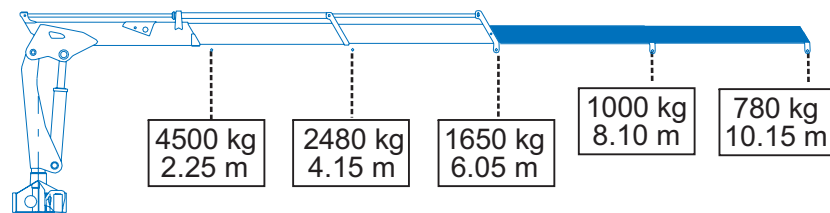


P 10200 M/3

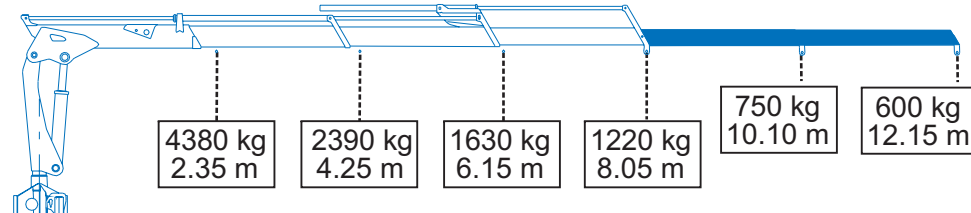


P 10200 M/4

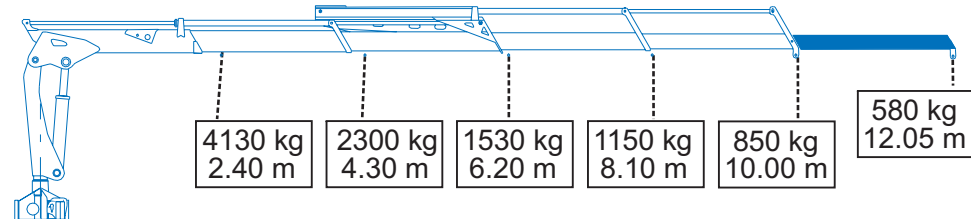


P 15000 M/2

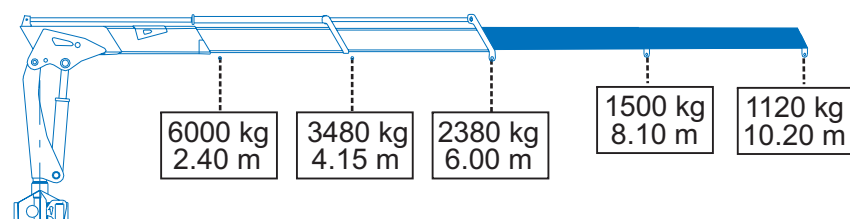


P 15000 M/3

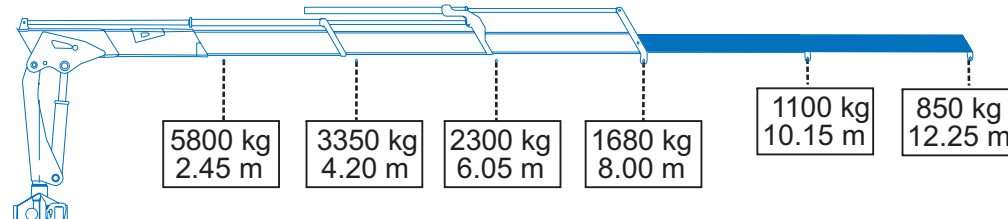


P 15000 M/4

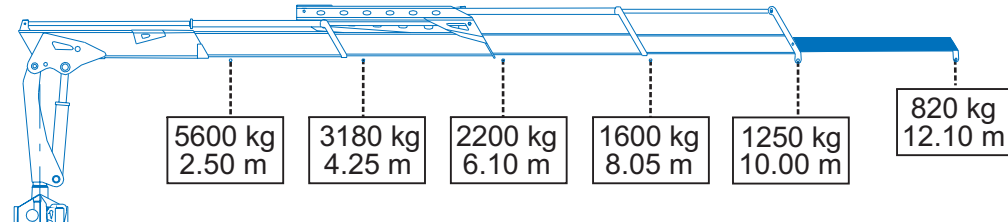


P 8000 M/3

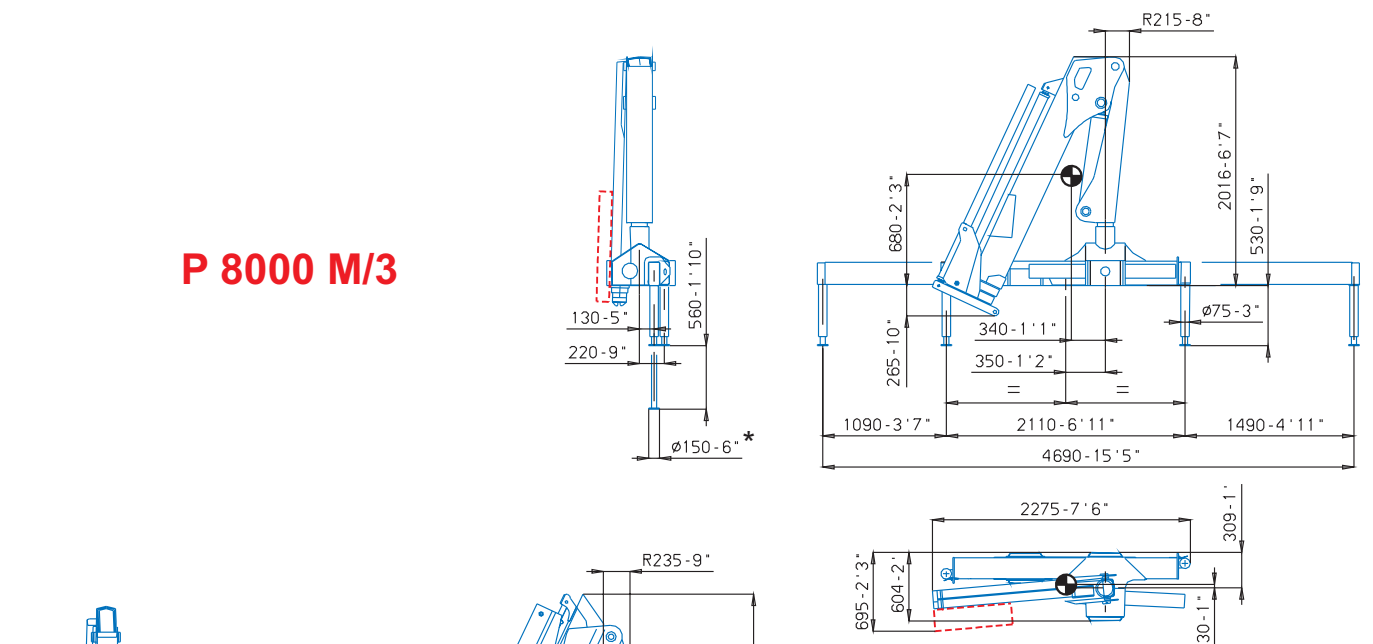

P 10200 M/4

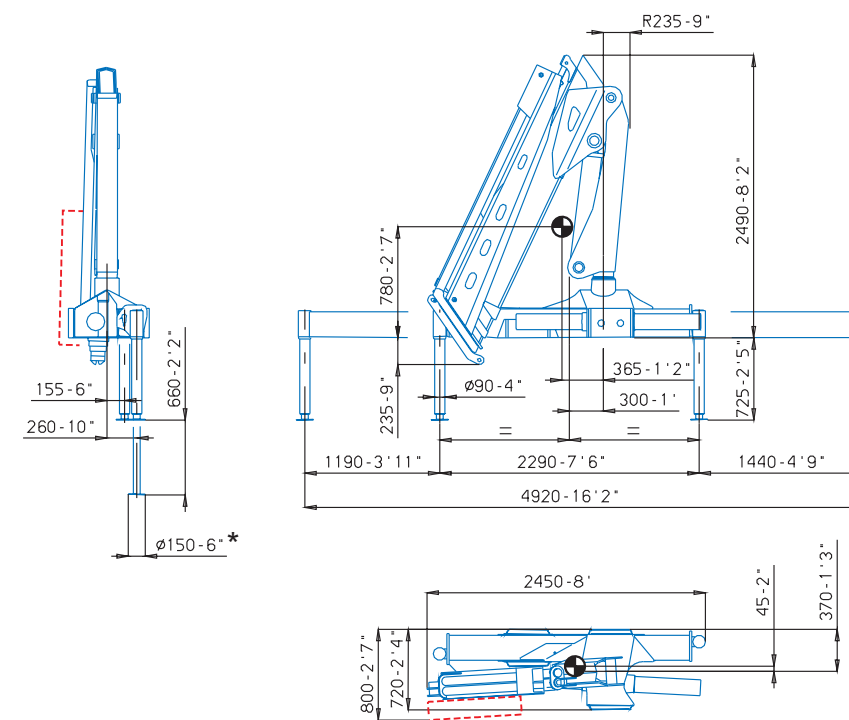

P 15000 M/4

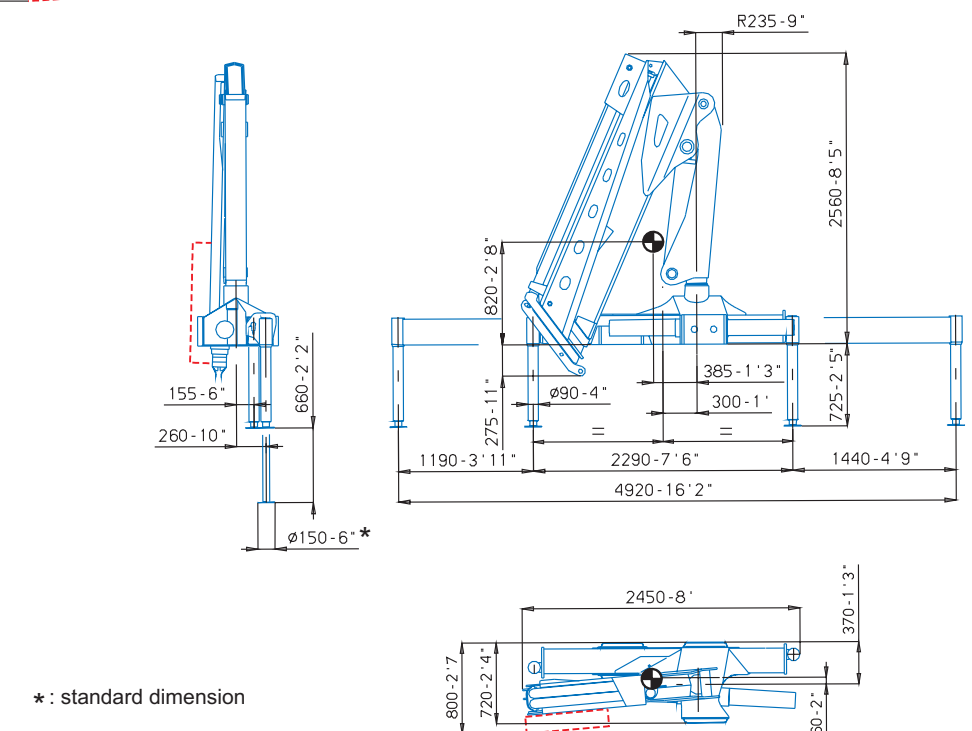

* : standard dimension